


Front ITO Film-0.188mm
 Back ITO Glass-1.8mm
 Thick: 2.3 ± 0.15

- Notes:**
- Type: Film to Glass
 - Operating Voltage: ≤10V (Operating Voltage: ≤10V)
 - Operating Temperature: -30°C ~ 70°C (Operating Temperature: -30°C ~ 70°C)
 - Life Time: 1,000,000 (Life Time: 1,000,000 times)
 - Connect Material: PC6 (Connect Material: PC6)
 - Response Time: ≤10ms (Response Time: ≤10ms)
 - Transmittance: ≥75% (Transmittance: ≥75%)
 - Surface Hardness: ≥3H (Surface Hardness: ≥3H)
 - Operation force: ≤100g (Operation force: ≤100g)
- Notes:**
- Resistance: 500 Ω < PIN1, PIN2 < 2500 Ω < PIN2, PIN4 < 2500 Ω < PIN4, PIN5 < 2500 Ω < PIN5, PIN1 < 2500 Ω

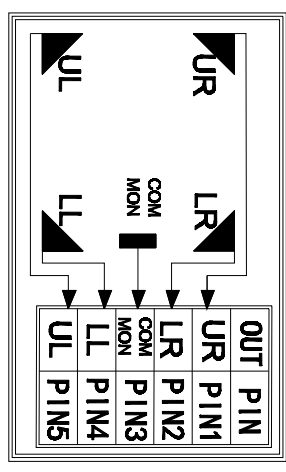

PITCH 2.54

TOLERANCES
(UNLESS OTHERWISE STATED)
 DECIMALS ANGLES 40.9%

>300MM	±2.00MM
100- < X < 300MM	±1.20MM
50- < X < 100MM	±0.50MM
20- < X < 50MM	±0.20MM
120- < X < 540MM	±0.20MM
30- < X < 120MM	±0.10MM

GreenTouch Technology Co., Ltd

Model No.:	GT-19-1	Size:	19"	Ratio:	4:3
Structure:	GT	Unit:	mm	Scale:	1:1
Design:	9/16	Date:	2020.03.30	Page:	1/1
Check:	4/17/16	Date:	2020.03.30	Version:	A0
Release:	EE	Date:	2020.03.30		